




preci-dip

# DIL SOCKETS


**SERIES**  
**150**

**150-PP-310-00-106161**  
2.54 mm, Surface mount pick and place


Specially designed for reflow soldering including vapor phase. With male contact pluggable into standard socket contacts and gull wing terminations

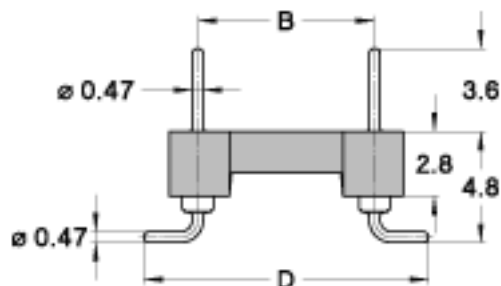

**Insulator**

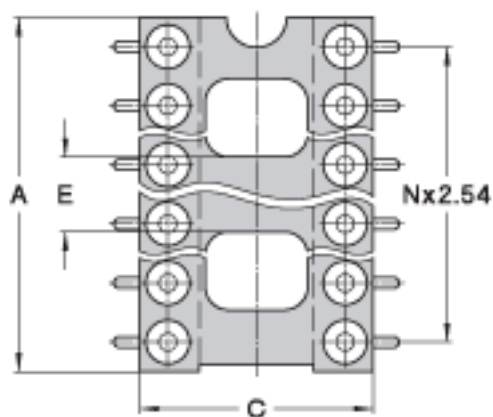

**PCB Layout**

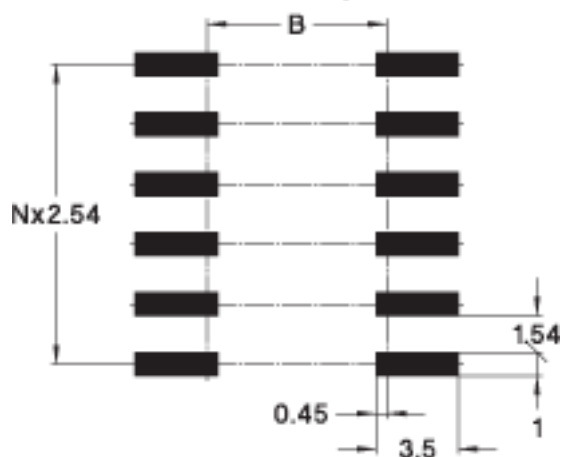

## TECHNICAL SPECS.:

**Insulator**

Black glass filled polyester PCT-GF30-FR

**Flammability**

UL 94V-O

**Contact**

Brass CuZn36Pb3 (C36000)

|                                     |                 |
|-------------------------------------|-----------------|
| <b>Connecting pin</b>               | 0.47 mm         |
| <b>Mechanical life</b>              | Min. 100 cycles |
| <b>Rated current</b>                | 1 A             |
| <b>Dielectric strength</b>          | Min. 1000 V RMS |
| <b>Coplanarity SMD terminations</b> | Max. 0.10 mm    |

## ORDERING INFORMATION:

|                 |              |                |
|-----------------|--------------|----------------|
| PP Plating code | Termination  | Connecting pin |
| 10              | Gold 0.25 µm | Gold 0.25 µm   |
| 80              | Tin          | Tin            |
| V3              | Tin          | Gold 0.75 µm   |

Tape & Reel Packaging: replace 161 by suffix 191 to part number Other pin counts please consult

## ADVANCED INFORMATION:

| Order Codes          | Poles | A    | B     | C    | D     | E    | See |
|----------------------|-------|------|-------|------|-------|------|-----|
| 150-PP-306-00-106161 | 6     | 7.6  | 7.62  | 10.1 | 12.30 | 7.6  |     |
| 150-PP-308-00-106161 | 8     | 10.1 | 7.62  | 10.1 | 12.30 | 10.1 |     |
| 150-PP-310-00-106161 | 10    | 12.6 | 7.62  | 10.1 | 12.30 | 12.6 |     |
| 150-PP-314-00-106161 | 14    | 17.8 | 7.62  | 10.1 | 12.30 | 5.3  |     |
| 150-PP-316-00-106161 | 16    | 20.3 | 7.62  | 10.1 | 12.30 | 5.3  |     |
| 150-PP-318-00-106161 | 18    | 22.9 | 7.62  | 10.1 | 12.30 | 5.3  |     |
| 150-PP-320-00-106161 | 20    | 25.4 | 7.62  | 10.1 | 12.30 | 8.3  |     |
| 150-PP-324-00-106161 | 24    | 30.4 | 7.62  | 10.1 | 12.30 | 8.3  |     |
| 150-PP-328-00-106161 | 28    | 35.6 | 7.62  | 10.1 | 12.30 | 8.3  |     |
| 150-PP-628-00-106161 | 28    | 35.5 | 15.24 | 17.7 | 19.22 | 10.0 |     |
| 150-PP-632-00-106161 | 32    | 40.6 | 15.24 | 17.7 | 19.22 | 10.0 |     |
| 150-PP-640-00-106161 | 40    | 50.8 | 15.24 | 17.7 | 19.22 | 10.0 |     |
| 150-PP-642-00-106161 | 42    | 53.4 | 15.24 | 17.7 | 19.22 | 10.0 |     |

# TECHNICAL ASSISTANCE

## GENERAL SPECIFICATIONS:

The values listed below are general specs applying for PRECI-DIP DIL sockets. Please see individual catalog page for additional and product specific technical data.

|                             |                  |
|-----------------------------|------------------|
| Operating temperature range | -55 ... +125 °C  |
| Climatic category (IEC)     | 55/125/21        |
| Operating humidity range    | annual mean 75 % |
| Max working voltage         | 100 VRMS/150 VDC |

PRECI-DIP sockets are recognized by Underwriters Laboratories Inc. and listed under "Connectors for Use in Data, Signal, Control and Power Applications", File Nr. E174442.

## MECHANICAL CHARACTERISTICS:

|                                   |   |
|-----------------------------------|---|
| Clip retention                    | Min. 40 N (no displacement under axial force applied) |
| Contact (sleeve / clip) retention | Min. 3.3 N acc. to MIL-DTL-83734, pt 4.6.4.2          |

## ELECTRICAL CHARACTERISTICS:

|  |  |
|--|--|
| Insulation resistance between any two adjacent contacts      | Min. 10'000 M at 500 V AC                        |
| Capacitance between any two adjacent contacts                | Max. 1 pF  |
| Air and creepage distances between any two adjacent contacts | Min. 0.6 mm (Min. 0.2 mm FOR SHRINK-DIP SOCKETS) |

## ENVIRONMENTAL CHARACTERISTICS:

The sockets withstand the following environmental tests without mechanical and electrical defects:

- Dry heat steady state IEC 60512-11-9.11i / 60068-2-2.Bb: 125 °C, 16h
- Damp heat cyclic IEC 60512-11-12.11m / 60068-2-30.Db: 25/55 °C, 90 – 100 %rH, 1 cycle of 24 h
- Cold steady state IEC 60512-11-10.11j / 60068-2-1.A: -55 °C, 2 h
- Thermal shock IEC 60512-11-4.11d / 60068-2-14.Na: -55/125 °C, 5 cycles 30 min
- Sinusoidal vibrations IEC 60512-6-4.6d / 60068-2-6.Fc: 10 to 500 Hz, 10 g, 1 octave/min, 10 cycles for each axis
- Shock IEC 60512-6-3.6c / 60068-2-27.Ea: 50 g, 11 ms, 3 shocks in three axis

During the above two tests no contact interruption >50 ns does appear.

- Solderability J-STD-002A, Test A, 245°C, 5 s solder alloy SnAg3.8Cu0.7
- Resistance to soldering heat J-STD-0020C, 260°C, 20 s
- Moisture sensitivity J-STD-020C level 1
- Resistance to corrosion :
  - 1) Salt spray test IEC 60068-2-11.Ka: 48 h
  - 2) Sulfur dioxide (SO<sub>2</sub>) test IEC 60068-2-42 Kc: 96 h at 25 ppm SO<sub>2</sub>, 25 °C, 75 %rH
  - 3) Hydrogen sulfide (H<sub>2</sub>S) test IEC 60068-2-43 Kd: 96 h at 12 ppm H<sub>2</sub>S, 25 °C, 75 %rH

## SOLDERLESS COMPLIANT PRESS-FIT CHARACTERISTICS:

### PRESS-FIT CHARACTERISTICS MEASURED ACC. TO IEC 60352-5

- Press-in force: 90 N max. (at min. hole dia.) / 65 N typ.
- Push-out force: 30 N min. (at max. hole dia.) / 50 N typ.
- Push-out 3rd cycle: 20 N min. (at max. hole dia.)

### PCB HOLE DIMENSIONS

- 2.54 mm grid: Finished hole Ø: 1 + 0.09/-0.06 mm | Drilled hole Ø: 1.15 ± 0.02 mm

## PCB HOLE PLATING

- PCB surface finish: Hole plating
- Tin: 5-15  $\mu\text{m}$  tin over min. 25  $\mu\text{m}$  copper
- Copper: min. 25  $\mu\text{m}$  copper
- Gold over nickel: 0.05-0.2  $\mu\text{m}$  gold over 2.5-5  $\mu\text{m}$  nickel over min. 25  $\mu\text{m}$  copper